

COUNTY OF HENRICO  
VIRGINIA

INTER-OFFICE MEMORANDUM

TO:	Planning Office	SUBJECT:	POD2021-00049: Laurel Park
	Henrico County Police Division,		
FROM:	Community Services Unit	DATE:	February 24, 2021

POD2021-00049

<Architectural + Site Plan + Landscaping + Lighting Plan Review>

- ☐ Henrico County Police Division recommends approval.
- ☒ Henrico Police recommends approval if the requirements in Section I are addressed.
- ☐ Henrico Police cannot complete our review at this time as additional information is needed.

---

SECTION I. Address the following items in order for Henrico Police to endorse this plan:

- ☒ Provide new plans with details to address items noted below.
- ☐ Provide a response addressing the items and/or stating the intent of the applicant.

Landscape Plan Comments:

1. **Show light pole locations on the landscape plan in an attempt to avoid conflicts. (make them bold)**
2. **The location of the light poles in relation to the trees needs to be considered, especially in parking lots and areas along the building's edge. The two should not be located in the same area, as illumination will be reduced as the tree matures.**
3. All shrubs and trees should be trimmed to allow for maximum visibility to and from the site and from within the site. Shrubs should have a natural growth habit of no more than 2 ½ to 3 feet, or should be maintained at this height, especially when located along an entrance, walkway or in a parking area.
4. Trees located around the buildings, walkways and parking areas should have a natural growth habit that is a tree-form, non-pyramidal shaped tree. If this cannot be done, the canopy of the trees should be maintained at least 4 feet from the ground as the tree matures.

Lighting Plan Comments:

1. **The minimum maintained light level should be no lower than 1.0 foot-candles throughout the parking areas, walkways, building entrance and building edge. See the attached picture that shows areas that don't meet the police guidelines. The areas that need additional light are as follows:**
  - **Building edge of all buildings**
    - **Including the courtyards of the apartment buildings**
  - **Alleys between the back side of the townhouses**
2. All light fixtures need to be full cut-off. See Photo's A and B for examples of full cut-off wall packs and pole lights.
3. Should post top fixtures be used, these fixtures also need to be full cut-off so that the light will be directed down to the ground, versus horizontally and up in the air. If decorative fixtures are installed, they should have the lamp in the top casing of the fixture so that the light will be directed towards the ground (See Photo C). This will also avoid glare because you don't actually see the lamp. Glare is defined as horizontal light that hinders vision.



Photo A. Shielded wall pack.

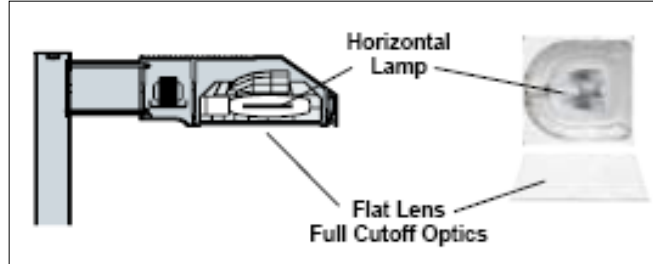


Photo B. Diagram of a full cut-off or concealed source fixture.



Photo C. The white globe visible to the eye in this post top fixture is decorative; the lamp is in the top of the fixture.

4. Lighting is one of the most economical and effective forms of crime prevention available. For lighting to be effective it must be uniformly distributed so that dark areas and areas of sharp contrast are not created. The Illuminating Engineer Society of North America defines uniformity as “the evenness of the distribution of light on the surface(s)”...which “aids security perception, while reducing the necessity for eye adjustment...” IESNA G-1-03, 5.4.
5. In creating uniform lighting, consider:
  - a) type of fixture
  - b) the height of poles
  - c) the direction of the light
  - d) spacing of fixtures
6. Routine maintenance of the lights is recommended.
  - a) A schedule should be established to review lights to determine if any need replacing.
  - b) Globes should be cleaned periodically to ensure full illumination from the light.
  - c) A program should be established to relamp the complex, also known as *group relamping*. This method reduces cost by minimizing site visits for the purpose of relamping, and it ensures that the lamps being replaced are consistent with all surrounding lamps.
  - d) A program should be established for the trimming and maintenance of tree canopies and other plant materials at or around the light poles so that illumination is not reduced.

#### Multi-Family Residential - Building Security Best Practices:


1. Doors should be solid core construction and a minimum of 1 3/4 inches thick.
2. A solid core door should contain a security peephole for the users of the residence.
3. Strike plates must be solidly anchored through the doorframe, into the framing studs, using screws three inches or longer in length. Otherwise, a swift kick could break the doorframe.
4. Utilize non-removable hinge pins or piano hinge/continuous hinge on all exterior doors.
5. *As applicable* - French doors, where one door is stationary, are often a vulnerable point in security. The doors should not have more than one-eighth (1/8) of an inch between them. Install a deadbolt-locking device (header and/or threshold bolts could be used) that meets fire code but can serve as both a key lock and a single cylinder deadbolt.
6. *As applicable* - Sliding glass doors are a particularly vulnerable point in security. Locking devices should be installed.
  - a) Install ‘Charlie-bars’ for the sliding glass doors.
  - b) Install two sheet metal screws inside the top of the track to eliminate someone from lifting the doors out of the tracks.
7. A garage should have the following security measures in place:
  - a) Remote garage opener system that is not interchangeable where it will open other garage doors.
  - b) Bolt in the garage to lock the garage door in place if the resident chooses to.
  - c) Deadbolt locks for the doors separating the garage from the interior of the home
8. *From National Fire Protection Association (NFPA) 730 Guide for Premises Security 2006 Edition:*

*As applicable* - A side panel by the front door. From National Fire Protection Association (NFPA) 730 Guide for Premises Security 2006 Edition.(7.3 Doors – 7.3.6.4) If an exterior door has a glass panel within 40 inches of the lock, consider the following options. This will prevent a burglar from breaking the glass and reaching in to unlock the door.

- a) Locate the sidelights on the hinge side of the door or the top of the door versus the deadbolt lock side.
- b) Replace the glass with UL-listed burglary-resisting glazing material, such as polycarbonate glazing.
- c) A piece of polycarbonate can be attached to the inside of the door behind the glass to provide backup protection.
- d) Protect the glass panel with a metal security screen.

#### **Commercial Building Security Best Practices:**

1. Provide access control (physical security) on all exterior doors.
2. All exterior entrances into the facility should be equipped with automatic door closers. The doors should also be equipped with self-locking devices that will engage immediately when the door has been closed.
3. The windows should not be tinted, especially at the entrance to the stores, to allow for surveillance opportunities both from within and from outside the building.
4. Install full to partial glass doors at locations where surveillance is needed. For service doors, install a reinforced vision panel, one-way window, wide-angle, or security peephole to promote visibility and safety for employees. (See Photo D) A security peephole offers a wider angle view and the employee can stand at least five feet away from the door to observe the exterior.
5. Utilize non-removable hinge pins or piano hinge/continuous hinge on all exterior doors.

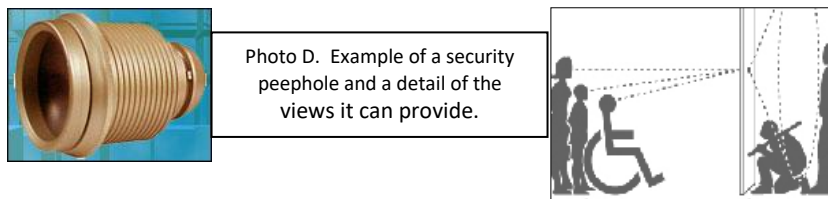

6. The following measures should be in place to increase the security for side, rear or storage doors:
  - a) Metal or solid core
  - b) Metal frames
  - c) Deadbolt locks- egress point: one that employs a thumb turn on the inside of the door
  - d) Reinforced strike plates
7. Advertisements and/or displays should not be located in and around the windows. If advertisements must be used, keep them small in size and locating them along the top of the windows. This will work towards increasing surveillance opportunities from within and from outside.
8. The following signage should be at all entrance doors:
  - a) Crime prevention messages such as “Time delay safe”, “Clerk cannot open safe”, etc., should be displayed in a conspicuous location.
  - b) Height tape should be applied to door frames at all exits used for the public to assist with identification of a suspect.
9. A safe room should be developed. A safe room requires a solid core door fitted with a peephole, deadbolt lock, and a telephone located inside the room. Conduct all banking procedures and the opening and closing of register drawers while secured inside the safe room. This room may also provide your employees a safe haven during a crisis situation.

10. Convex mirrors should be installed to allow employees to monitor blind spots and unmonitored areas located inside the building.
11. Install a video surveillance system (VSS) for the interior and exterior of the site.
12. Install full to partial glass doors at locations where surveillance is needed. For service doors, install a reinforced vision panel, one-way window or wide angle peephole to promote visibility and safety for employees.
13. For those doors and windows with limited to no visibility from the street, consider adding security film to help 'harden the target'. Cover glass doors and windows within 40" of door locking mechanisms with a security film to prevent penetration. A 6 - 8 millimeter thick film is suggested. Resource options: [www.llumar.com](http://www.llumar.com) and [www.vista-films.com](http://www.vista-films.com). See web sites for a local installer.
14. Locate a doorbell outside this rear door for companies to use when making scheduled deliveries.
15. Exterior doors should be of a solid-core design or steel construction with hinges on the interior of the door (in residential applications and where permitted by codes) and a keyed lock with a strike bolt into a solid frame. Frames should be fastened to the wall studs by using long screws to insure the door's stability. Strike plates should also be firmly fastened to the frame to avoid being ripped out. (From *National Fire Protection Association, NFPA 730 Guide for Premises Security 2006 Edition*. 7.3.5) When an exterior door is considered as an emergency egress point, from NFPA 730, 7.2.18. Install a delayed egress locking system using a push bar, automatic door closers, a magnetic lock and a door alarm that will activate if the door is opened. The delayed egress locking system also requires that a sign be posted on the door instructing the occupant to push on the bar for 30 seconds until the door opens. Do not install hardware on the outside of this door.

---

The Henrico Police Division supports and implements Crime Prevention Through Environmental Design (CPTED), which is the theory that the proper design and effective use of the built environment can lead to a reduction in the incidence and fear of crime and an improvement in the quality of life.

The following characteristics need to be in place at this site.

1. *Natural Surveillance*. Provide natural surveillance throughout the site, especially to parking areas, buildings, building entrances, walkways, etc. Natural surveillance is the placement of physical features, activities and people in such a way as to maximize visibility.
2. *Natural Access Control*. Provide natural access control throughout the site. Natural access control is the physical guidance of people coming and going from a space by the judicious placement of entrances, exits, fencing, landscaping and lighting. The goal is to guide people where you want them to go and how you want them to get there.
3. *Territorial reinforcement*. Territorial reinforcement is the use of physical attributes that express ownership, such as fences, pavement treatments, art, signage and landscaping. The goal is to promote ownership and pride in where you live and work.
4. *Maintenance*. Allows for the continued use of space for its intended purpose. It also serves as an additional expression of ownership.

---

While our requirements for the endorsement of the plan do not guarantee a crime-free environment, it is our experience that the application of the concepts of Crime Prevention Through Environmental Design (CPTED) will reduce the opportunity for crime to occur and will enhance the quality of life. Should you have any questions or comments, please contact me at 804-501-5370.

Billy Moffett  
CPTED Planner



Areas that could use additional lighting:

